




GESCHA Air blow gun

Professional light weight air blow gun. Fatigue free working, lever can be worked with low pressure. The air amount can be adjusted progressively. Composite material plastic blue insulated and abrasion-resistant.

Useable from - 15°/+70°X, 110 gr., max pressure 10 bar.

Air blow gun		
Art.-No.	Description	Nozzle length
70490-P-27-MT-N-E	Air blow gun with scratch proof straight nozzle	59 mm (6 bar – 15 Nm ³ /h)
70490-P-27-SI-N-E	Safety air blow gun (Acc. OSHA 1910.242B), dynamic pressure at 6 bar, 10 mm in front of the nozzle 12 bar, Outgoing pressure limited to 1.93 bar	69 mm (6 bar – 15 Nm ³ /h)
70490-P-27-OS-N-E	Low noise air blow gun (77 dB)	56 mm
70490-P-27-PR-N-E	Air blow gun with metal nozzle	110 mm (6 bar – 23 Nm ³ /h)

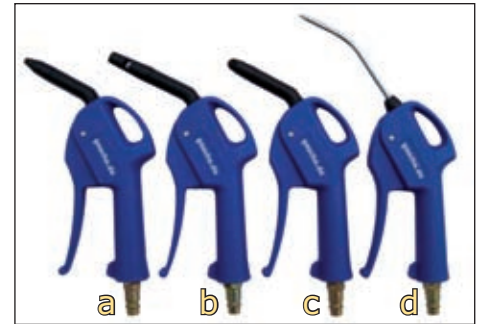

GESCHA Air Blow Guns

- a: Air blow gun with scratch proof straight nozzle
 b: Safety Air blow gun with scratch proof nozzle and Venturi effect
 c: Quiet, low noise air blow gun with straight nozzle
 d: Air blow gun with long pointed metal nozzle

GESCHA Double filter- / Triple filter unit

Special double air filter unit, available as triple filter unit with additional active carbon unit (Separation 99,99 %). Regulator (0 to 6 bar) for painting. Special filter set for spray guns for high quality paint jobs.

Filter unit includes mounting bracket on the side for wall mounting. The stable construction and user friendly handling speak for themselves.

Max. pressure: 12 bar, female thread 1/2", 2xquick release coupling with 1xnipple

Filter unit		
Art.-No.	Description	Filtration
70490-P-TB-CS-M3	Double filter unit Flow rate: 3000 l/min	5 and 0,01 μ
70490-P-MS-CE3	Triple filtration unit Edition same as double filter unit additional: Oil separator: 0.0003 mg/m ³ , Activated carbon filter unit, Flow rate: 2000 l/min	5 μ 0,01 μ 0,0001 μ



GESCHA Double filter unit for painting with regulator and mounting bracket

GESCHA Special Compressed Air Hose/Hose reel

Antistatic required special compressed air hose for spray guns.

Internal surface: smooth EPDM black

Outer surface: smooth EPDM blue

Electric conductive, enhancement: Synthetic mesh

Length: 10 m; diameter: inner 8 mm outer 15 mm

Pressure: 20 bar; Temperature: max. 100 °C, connection 1/4"

Special compressed air hose / hose reel	
Art.-No.	Description
70490-P-Flex-8-Set10	Special compressed air hose -SET antistatic 10m, with quick connect and fitting
70490-P-Flex-8	Special compressed air hose antistatic by meter (supply desired length)
70490-DRF-0815-ERC	Gescha hose reel with 10 m hose (not antistatic)




Special compressed air hose

GESCHA reel

GESCHA Quick release coupling / Connection Nipple

Quick release coupling / Connection Nipple	
Art.-No.	Description
70490-ERC-...*	Quick release (a) especially for spray guns. Easy to use with push button for connection and disconnection. Work comfort and performance guaranteed because of light weight. Using the coupling reduces the danger of scratches on the surfaces painted. 1/2" with cylindrical male thread (c) air hose connection in all conventional sizes available
70490-ERP-...*	Connection nipple with conical male thread (b)

*internal thread: 1/4", 3/8", 1/2"; external thread: 1/4", 3/8", 1/2", gland Ø: 6, 8, 9, 10 or 13 mm

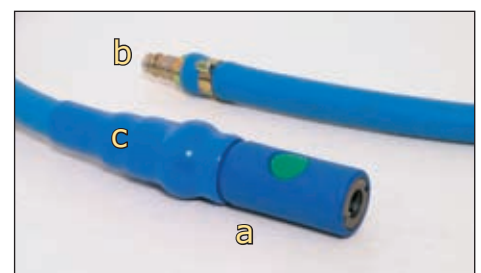

GESCHA Quick release coupling