



# Paint drying trolley Standard, Standard +



GESCHA Standard +:  
with two additional racks



2 parts  
the plus of the Standard +  
loadable from the front and back

## GESCHA Paint drying trolley "Standard"

**Uncomplicated and fast**

**The basic model of our paint drying trolley series:**

Uncompromising, stable, versatile and uncomplicated to use is the basic model of our drying trolley series. Due to the **GESCHA WikiWiki-plug in system** the trolley can be changed easily in no time without any tools. You are saving valuable work time and can adjust your trolley according to your actual need. If you're not using it, the GESCHA Standard can be collapsed fast and easy and stored away at minimum space needed.

- Flexible, robust and stable
- Easy to extend and push back together
- Gescha-WikiWiki-plug in system (no tools required)
- High-quality yellow coated shelf rests
- 4 Guide rollers, 2 with brakes
- Can be extended with an intermediate rack
- To be loaded on one side only




GESCHA-WikiWiki-Plug in system

## GESCHA Paint drying trolley "Standard+"

Stay flexible: **The Standard + can be loaded in front as well as in the back.** With its shelf rests with extendable inserts, the depth of your loading area can be increase considerably.

- More loading depth due to shelf rests with extension rods
- Can be loaded on both sides
- Overturn protected due to extendable back rollers

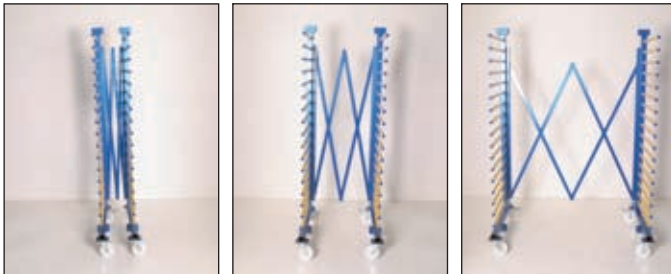

Easy to extend and push together for space saving

| Paint drying trolley Standard, Standard+       |                          |                          |   |         |                                |      |                            |               |                 |
|--|--------------------------|--------------------------|---|---------|--------------------------------|------|----------------------------|---------------|-----------------|
| Type/<br>Art.-No.                              | L, D, H<br>(mm)          | Usable<br>length<br>(mm) | Max. total<br>Weight (kg)<br>at evenly distributed weight<br>without impact loading |         | Max.<br>bars<br>front/<br>back | bars | Tiers<br>Clearance<br>(mm) | Rod Ø<br>(mm) | Wheel Ø<br>(mm) |
|  |                          |                          | Max. load/<br>Pair (kg)   |         |                                |      |                            |               |                 |
| Standard<br>2 racks/ 23098                     | 300 - 2000,<br>750, 1840 | 600                      | 400   | 70      | 17 / -                         | 34   | 70                         | 24            | 125             |
| Additional<br>rack type<br>Standard/ 23100-E   | -                        | 600                      | -   | 70      | 17 / -                         | 17   | 70                         | 24            | -               |
| Standard+<br>2 racks/ 23099                    | 300 - 2000,<br>840, 1840 | 600 - 900                | 400   | 70 - 44 | 17 / 17                        | 34   | 70                         | 24            | 125             |
| Additional<br>rack type<br>Standard+ / 23100-D | -                        | 600 - 900                | -   | 70 - 44 | 17 / 17                        | 17   | 70                         | 24            | -               |