


Corrugated Floor




GESCHA Corrugated Floor

A clean solution for your work shop floor

Using the **GESCHA patented corrugated floor** greatly improves the efficiency of your spray mist extraction unit. This is particularly true, if it is combined with the indirect GESCHA metal front cover system. But even with simple, direct extraction units great improvements can be achieved. The lengthwise direction of the segments results in a higher air draw towards the extraction unit. Solvent vapors collecting in the depths of the corrugated floor are guided straight to the extraction wall.

A great advantage: The overspray from the spray gun hitting the ground is bundled and taken straight to the extraction wall. This helps to avoid dust swirls on the ground.

Furthermore with the corrugated floor you are receiving a surface, on which **less spray mist and dust swirls** can occur. The cleaning is simple and can be done with a broom. For sticky paint we recommend to spray the corrugated floor with a separation spray (i.e. the effective GESCHA Cleaning grease on Teflon basis.)

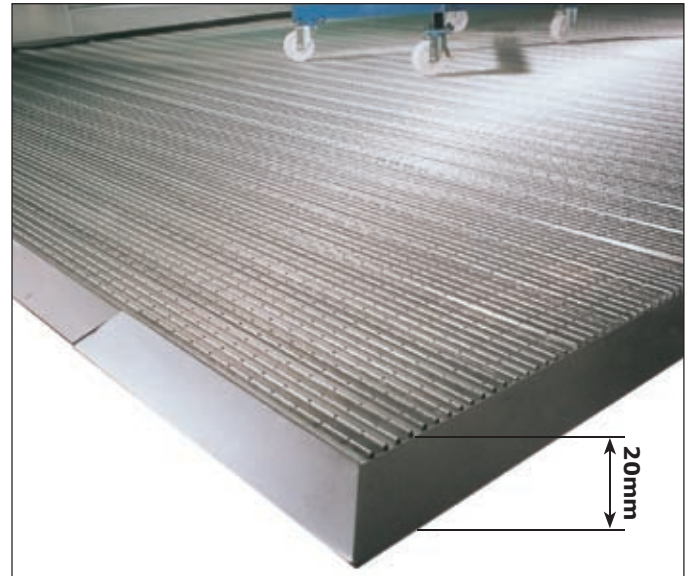

Maximum effect, minimum height: only 20 mm high




To walk on and passable for equipment




The loadable GESCHA corrugated floor

Corrugated floor			
Art.-No.	Description	Single segments	Width x Depth mm
390-SET22	Corrugated floor SET 2 x 2	21	2000 x 2000
390-SET23	Corrugated floor SET 2 x 3	21	2000 x 3000
390-SET32	Corrugated floor SET 3 x 2	31	3000 x 2000
390-SET33	Corrugated floor SET 3 x 3	31	3000 x 3000
390-SET34	Corrugated floor SET 3 x 4	31	3000 x 4000
390-SET43	Corrugated floor SET 4 x 3	41	4000 x 3000
390-SET44	Corrugated floor SET 4 x 4	41	4000 x 4000
390-SET54	Corrugated floor SET 5 x 4	51	5000 x 4000
390-SET46	Corrugated floor SET 4 x 6	41	4000 x 6000
390-SET64	Corrugated floor SET 6 x 4	61	6000 x 4000
Included in each SET: On ramp: Height: 20 mm (3 sides) and end piece			
Optional: other sizes and editions available upon request!			
Accessories			
39100	Cleaning rake with handle		
590064	Teflon spray (1 litre)		

The corrugated floor (height: 20mm) is galvanized. The single segments are laid into each other. The length direction has to point towards the extraction unit. The front ramp and the end piece should be mounted to the floor.



Only 20 mm high and fast to set up: just lay them into each other

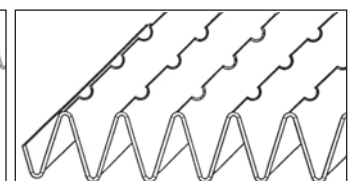

Maximum dirt collection area with minimum walking surface